DIAMOND™

VideoStream™

WPCTVPRO

User Manual

Getting started

Package Contents:

PC to TV receiver x 1

PC to TV USB transmitter x 1

HDMI cable x 1

Installation CD x 1

Quick installation guide x 1

PC System Requirements:

DisplayLink software can be used on PCs, from Netbooks, Notebooks/Laptops to Desktops. The driver will run on processors ranging from Atom N270 based PCs, basic single Core CPUs, and of course the latest Dual, Quad Core and Core i3/i5/i7 CPUs.

The performance of the software is dependent upon the processing power available, as well as the operating system in use. More capable systems will provide better performance.

DisplayLink software is available for PCs running one of the following Windows operating systems:

Windows 7 (32-bit or 64-bit)

Windows Vista with Service Pack 1 or 2 (32-bit or 64-bit)

Windows XP Home or Professional (including Tablet edition) with Service Pack 2 or 3

Windows Server 2003, 2008 and 2008 R2

Note: 64-bit editions of XP are not supported.

Recommended typical system requirements

are: Windows 7

For Windows 7, the Windows Experience Index (WEI) is a useful measure of hardware level. The WEI is accessible from Computer > Properties, or from Control Panel > System.

The recommended typical hardware requirements for the PC are:

WEI score of at least 3 in the 'Graphics; Desktop performance for Windows Aero' category.

Overall WEI score of at least 3 as recommended by Microsoft.

At least one USB 2.0 port.

30 megabytes (MB) of free disk space.

Computer screen for use with the DisplayLink device, if it is not integrated.

Network access for software downloads, or access to a CD-ROM drive.

Windows Vista

For Windows Vista, the Windows Experience Index (WEI) is a useful measure of hardware level. The WEI is accessible from Computer > Properties, or from Control Panel > System.

The recommended typical hardware requirements for the PC are:

WEI score of at least 3 in the 'Graphics; Desktop performance for Windows Aero' category.

Overall WEI score of at least 3 as recommended by Microsoft.

At least one USB 2.0 port

30 megabytes (MB) of free disk space.

Computer screen for use with the DisplayLink device, if it is not integrated.

Network access for software downloads, or access to a CD-ROM drive.

Windows XP

For 1-2 monitors, business usage, productivity target. This may not provide full frame rate DVD playback at full screen.

1.2GHz Single Core CPU

512MB memory

1.6GHz CPU

1GB memory

For 6 screens where 1 screen can run full screen DVD video:

1.8GHz Core Duo

1GB memory

At least one USB 2.0 port.

30 megabytes (MB) of free disk space.

Computer screen for use with the DisplayLink device, if it is not integrated.

Network access for software downloads, or access to a CD-ROM drive.

Hardware setup

IMPORTANT NOTICE: The WPCTVPRO Transmitter and Receiver must be placed with in line of sight and in the same room. This device uses Ultra Wide Band Samsung wireless solution and cannot transmit or receive through walls or other large obstructions.

Connect the HDMI cable to the WPCTVPRO base receiver and then connect the other end of the HDMI cable to your HDTV/Projector. Alternately you can use the VGA port of your display or projector does not support HDMI. VGA cable is not included

Plug the supplied power adapter into an AC outlet and then connect the plug into the WPCTVPRO base receiver.

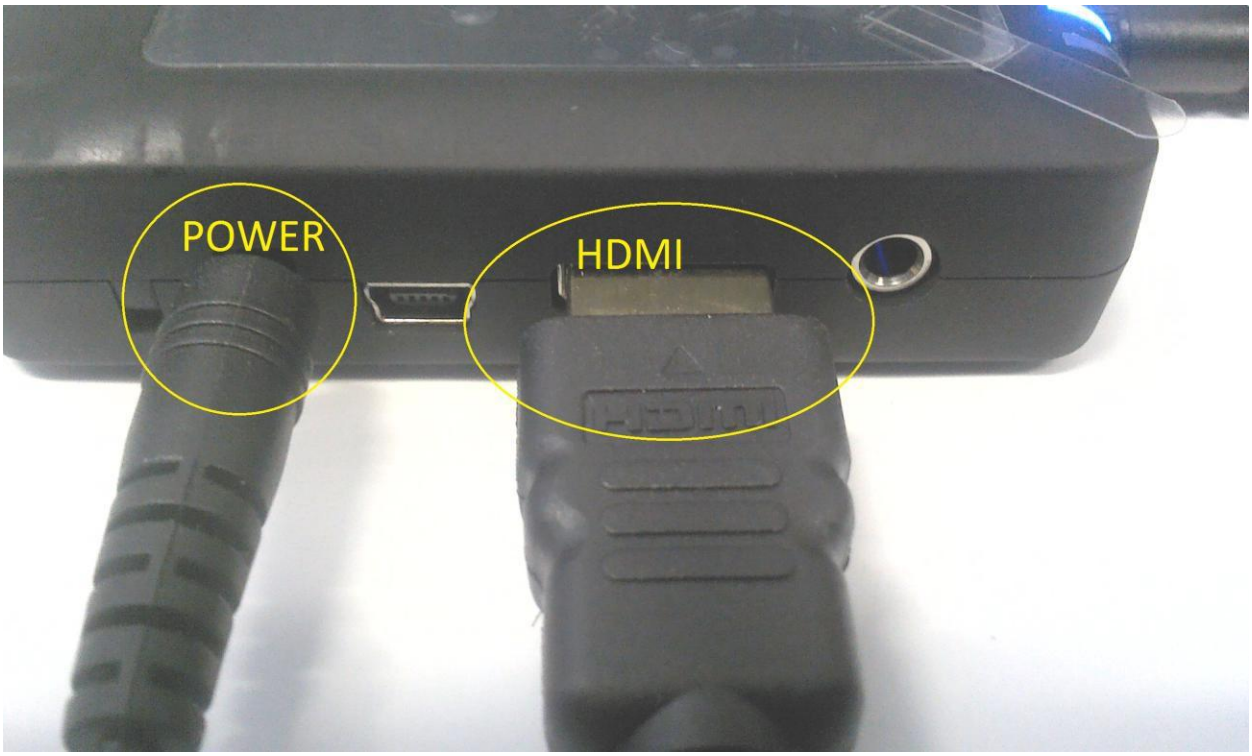

Proceed with the Software Driver installation. Do not plug the USB PC adapter until instructed to below. The following instructions are for Windows 8, 8.1 and Windows 7.

Installing the WPCTVPRO DisplayLink USB Graphics Software

The following section shows you how to install the DisplayLink USB Graphics software on different operating systems.

Windows 8 and Windows 8.1

Windows 8/8.1 DisplayLink software can be installed from Windows update (Recommended and must have Internet access).

Plug the USB transmitter into a free USB 2.0/3.0 port to your computer. Windows update will automatically download and begin the installation. Note: if you are using a Microsoft Surface Pro you may need a USB extension cable as it has been reported that the transmitter may not be able to plug in all the way.

Alternatively, the software can be downloaded and installed from the DisplayLink website following the steps below.

Important notice for manual installations! Do not connect your WPCTVPRO to your PC before the install.

Note: To ensure you have the latest driver release, it is recommended to down load the drivers from Displaylink.com, which is the USB graphic chipset used on the Diamond WPCTVPRO. If you do not have internet access you can use the drivers located on the included Install CD.

http://displaylink.com/support/downloads.php

Double click on **Setup.exe** or example; **DisplayLink_7.7 M0.exe**, where 7.7 is the version and may vary depending on the latest version release number.

Click **Yes**

The DisplayLink software end user license agreement window opens.

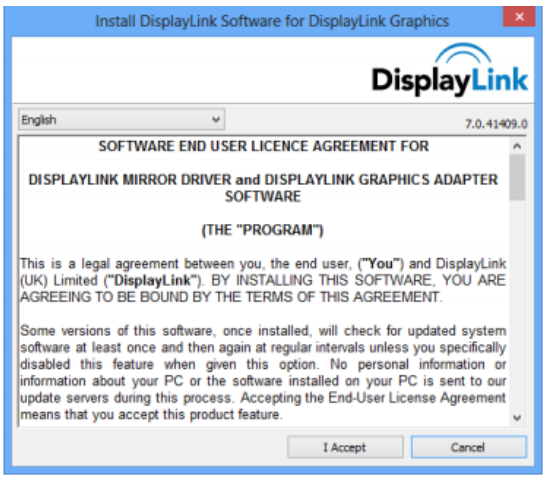

Click **I Accept**.

DisplayLink Core software and DisplayLink Graphics installs.

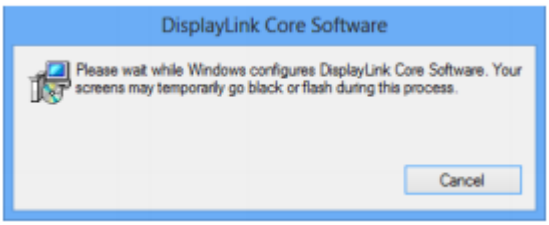

Note: The screen may flash or go black during the install.

No message will be shown at the end of the install.

Connect your DisplayLink device via the USB cable to your PC.

A message will be shown that DisplayLink software is configuring itself for first use:

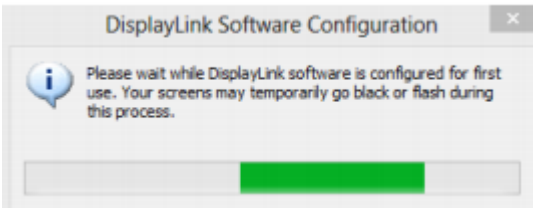

The screen should flash and the DisplayLink device should start to extend the Windows desktop.

Windows 7

The preferred method of installation is using Window 7's Windows Update facility.

Connect your DisplayLink device via the USB cable to your PC

Windows detects the new hardware and automatically downloads the driver.

Once downloaded, the install will run

The DisplayLink software end user license agreement window opens.

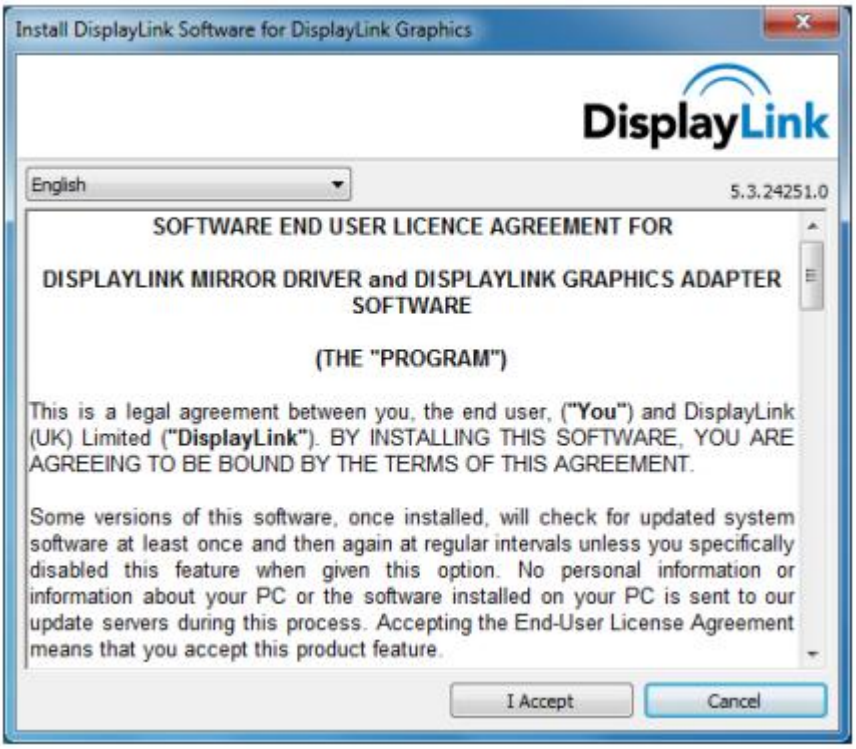

Click **I Accept**.

The DisplayLink Core software installs

Note: The screen may flash or go black during the install.

Alternatively you may install the software from a website below or CD-ROM:

http://displaylink.com/support/downloads.php

Important notice for manual installations! Do not connect your WPCTVPRO to your PC before the install.

Double click on **Setup.exe** or example; **DisplayLink_7.7M0.exe**, where 7.7 is the version and may vary depending on the latest version release number.

The Windows User Account Control window opens (if enabled in the OS).

Click **Yes**

The DisplayLink software end user license agreement window

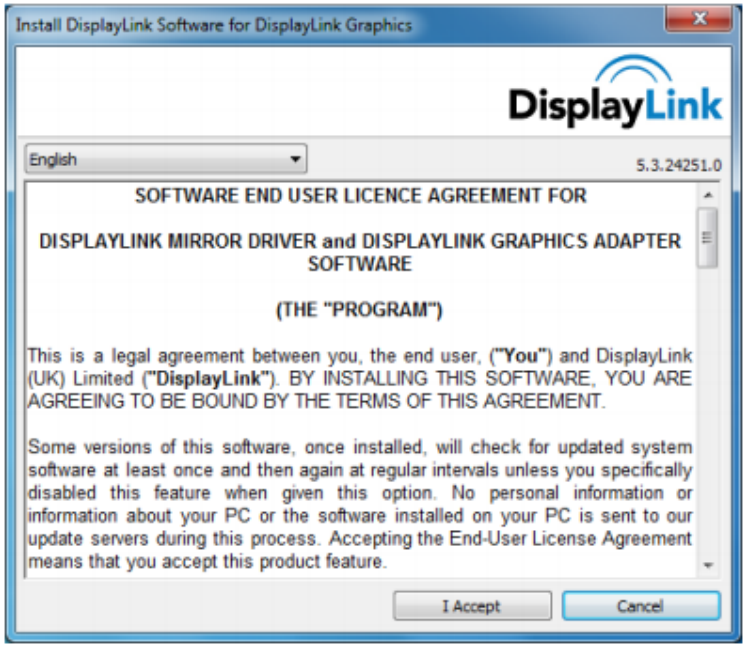

opens.

Click **I Accept**

DisplayLink Core software and DisplayLink Graphics installs.

Note: The screen may flash or go black during the install.

No message will be shown at the end of the install.

Connect your DisplayLink device via the USB cable to your PC.

Installing device driver message

Note: On some machines you may need to reboot before you can use your DisplayLink enabled device.

During installation, a compatibility check is run on your system. Any potential issues found will be alerted to the user.

Configuring Your Displays

Windows 8 and Windows 7

When devices are attached, an icon appears in the taskbar. This gives you access to the DisplayLink manager menu.

From the taskbar, click the Show hidden icons arrow to show all available icons.

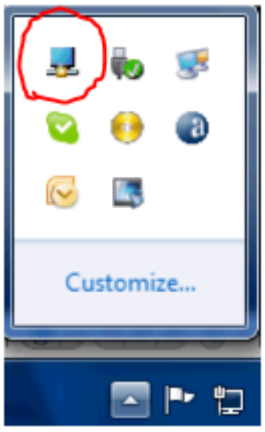

Click the DisplayLink icon .

A menu appears with several options. These are shown and described below.

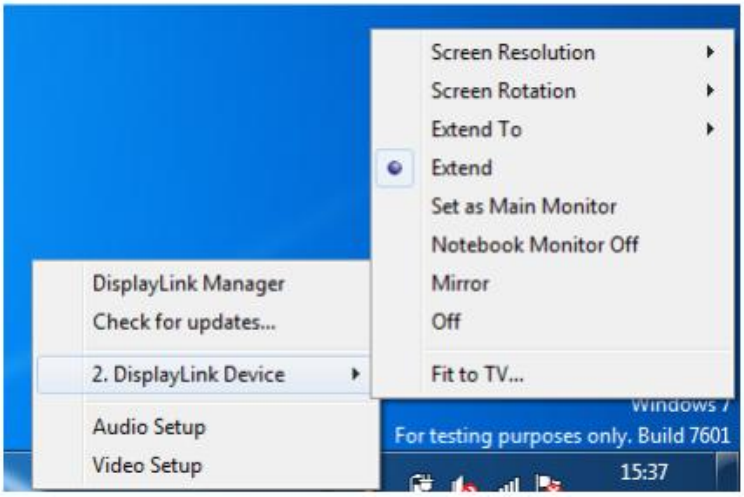

Menu Option	Sub-menu Option	Description
DisplayLink Manager		This is the UI title. Clicking on this item will show the version of DisplayLink software installed.
Check for Updates		Connects to the Microsoft Windows Update Server to check for newer software versions and downloads them, if available.
DisplayLink devices	Options to configure this DisplayLink device	In this section of the menu, a list of connected DisplayLink devices will appear. Each of these devices has its own sub-configuration menu. These Submenu options are covered in the table below.
Audio Setup		Opens the Windows Audio Configuration Window.
Video Setup		Opens the Windows Screen Resolution window.

Display Menu	Description	
Screen Resolution		Displays a list of available resolutions. Some resolutions may be enclosed by [ ]. Please see, Inferred Modes. This option is not available in mirror mode, as the resolution is defined as the resolution of the main monitor.
Screen Rotation	Normal	No rotation is applied to the DisplayLink display
	Rotated Left	Rotates the extended or mirrored display by 270 degrees clockwise.
	Rotated Right	Rotates the extended or mirrored display by 90 degrees clockwise.
	Upside-Down	Rotates the extended or mirrored display by 180 degrees clockwise.
Extend To	Right	Extends the display to the right of the main display.
	Left	Extends the display to the left of the main display.

Display Menu	Description	
	Above	Extends the display above of the main display.
	Below	Extends the display below the main display.
Extend		Extends your Windows desktop onto this display.
Set as Main Monitor		Sets this screen as the main display.
Notebook Monitor Off		Switches off the display of the notebook and makes the DisplayLink display the main display. Note: This option will only appear when 1 DisplayLink USB screen, is connected. It will also only appear on Laptop computers.
Mirror		Copies what is on the main display and reproduces it on this display. Note: The resolution of this display and the primary must be the same in mirror mode. This may be lower than the preferred resolution of the display. It is only possible to mirror 2 displays. If a display is already set to mirror mode, this option will be greyed out for the other DisplayLink displays and not available.
Off		Switches off this display.
Fit to TV		If the Windows desktop does not completely appear on the TV, this option can be used to adjust the size of the Windows desktop. See “Fit to TV” for details on how to configure this feature. Notes: • This option will only appear when 1 DisplayLink USB screen, is connected • This option will only work in extend mode. Selecting the option in mirror mode will extend the displays.

Support Information

On-Line Diamond Multimedia Support:

http://tickets.diamondmm.com/

On-Line Diamond Multimedia Knowledge base:

http://tickets.diamondmm.com/kb/index.php

Diamond Multimedia WPCTVPRO Product Page:

http://www.diamondmm.com/WPCTVPRO-display-adapter.html

Obtaining the latest drivers from DisplayLink:

To ensure you have the latest DisplayLink Drivers it is recommended to download the drivers from the following link:

http://displaylink.com/support/downloads.php

DisplayLink Knowledge Base:

http://displaylink.com/support/knowledgebase.php

Windows Vista and XP instructions are located on the Installation CD

One Year Limited Warranty

The warranty described below is extended only to the original buyer and is not transferable.

PLEASE NOTE THAT THE PRODUCT YOU HAVE PURCHASED IS DISTRIBUTED AND WARRANTED BY DIAMOND

MULTIMEDIA ("DIAMOND") AS DESCRIBED BELOW. QUESTIONS REGARDING THIS WARRANTY AND

WARRANTY CLAIMS SHOULD BE MADE TO DIAMOND.

Diamond warrants to the original purchaser of the hardware product, that the product is free from defects in materials or

workmanship under normal use and service for a period of one (1) year from the date of purchase at retail. All cables and

accessories provided with a Diamond product are warranted to be free from defects in materials or workmanship under

normal use and service for a period of for (90) ninety days from date of purchase at retail. Diamond ’s sole obligation under this warranty shall be, at Diamond ’s option, to: (i) repair the defective product or part; (ii) deliver to customer an equivalent product or part to replace the defective product. When a product or part is replaced or exchanged, the item becomes customer’s property and the replaced or exchanged item becomes Diamond ’s property. When a refund or replacement product is given, the defective product becomes Diamond’s property. Replacement parts or products may be new or include serviceable used parts with at least the same functional equivalence to the original product. If, at the time of repair, a product is "out of warranty" or within the last ninety (90) days of the warranty period, Diamond warrants any repair for ninety (90) days. All software provided is subject to the terms of the associated software end-user license agreement.

WARRANTY EXCLUSIONS AND LIMITATIONS THIS WARRANTY IS ONLY APPLICABLE TO PRODUCTS SOLD BY DIAMOND AFTER MAY 1, 2007. THIS WARRANTY IS ONLY APPLICABLE IF PRODUCT REGISTRATION IS RECEIVED WITHIN 30 DAYS OF THE DATE THE PRODUCT IS PURCHASED. TO BE ELIGIBLE FOR THIS WARRANTY, YOU MUST REGISTER AT

diamondmm.com. THE ORIGINAL SALES RECEIPT SHOWING THE DATE OF PURCHASE OF THE PRODUCT IS

PROOF OF THE DATE OF PURCHASE. DIAMOND MAY REQUEST THE ORIGINAL SALES RECEIPT OR A COPY AS

PROOF OF DATE OF PURCHASE.

Diamond does not warrant third party products which Diamond distributes "AS IS" unless otherwise specified. Third party

products may be warranted by the third party. Diamond makes no warranty or representation that: (i) the operation of the product will be uninterrupted or error free; (ii) defects in the product will be corrected; or (iii) that the product will meet Customer’s requirements or work in combination with any hardware or software provided by third parties.

TO THE FULLEST EXTENT ALLOWED BY LAW, THE WARRANTIES, REMEDIES AND LIMITATIONS CONTAINED

HEREIN ARE EXCLUSIVE AND ARE IN LIEU OF ALL OTHER WARRANTIES, TERMS OR CONDITIONS,

EXPRESS OR

IMPLIED, EITHER IN FACT OR BY OPERATION OF LAW, STATUTORY OR OTHERWISE, INCLUDING WITHOUT

LIMITATION, WARRANTIES, TERMS OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR

PURPOSE, QUALITY, CORRESPONDENCE WITH DESCRIPTION AND NON-INFRINGEMENT, ALL OF WHICH ARE

EXPRESSLY DISCLAIMED. DIAMOND WILL NOT BE LIABLE UNDER THIS WARRANTY IF ITS TESTING AND EXAMINATION DISCLOSE THAT THE ALLEGED DEFECT OR MALFUNCTION IN THE PRODUCT OR SOFTWARE DOES NOT EXIST OR WAS CAUSED BY CUSTOMER'S OR ANY THIRD PARTY'S MISUSE, NEGLECT, IMPROPER INSTALLATION OR TESTING, UNAUTHORIZED ATTEMPTS TO OPEN, REPAIR OR MODIFY THE PRODUCT OR SOFTWARE, OR ANY OTHER CAUSE BEYOND THE RANGE OF THE INTENDED USE, OR BY ACCIDENT, FIRE, LIGHTNING, OTHER HAZARDS, OR ACTS OF GOD. THIS WARRANTY WILL NOT APPLY TO PRODUCTS USED FOR NUCLEAR RELATED, WEAPONS

RELATED, MEDICAL OR LIFE SAVING PURPOSES. TO THE FULLEST EXTENT ALLOWED BY LAW, DIAMOND ALSO EXCLUDES FOR ITSELF AND ITS SUPPLIERS ANY LIABILITY, WHETHER BASED IN CONTRACT OR TORT (INCLUDING NEGLIGENCE), FOR INCIDENTAL, CONSEQUENTIAL, INDIRECT, SPECIAL OR PUNITIVE DAMAGES OF ANY KIND, OR FOR LOSS OF REVENUE OR PROFITS, LOSS OF BUSINESS, LOSS OF INFORMATION OR DATA, OR OTHER FINANCIAL LOSS ARISING OUT OF OR IN CONNECTION WITH THE SALE, INSTALLATION, MAINTENANCE, USE, PERFORMANCE, FAILURE, OR INTERRUPTION OF ITS PRODUCTS, EVEN IF DIAMOND, ITS SUPPLIERS OR ITS RESELLER HAS BEEN ADVISED

OF THE POSSIBLITY OF SUCH DAMAGES. DIAMOND 'S SOLE LIABILITY WITH RESPECT TO ITS PRODUCT IS

LIMITED TO REPAIR OR REPLACEMENT OF THE PRODUCT, AT DIAMOND 'S OPTION. THIS DISCLAIMER OF

LIABILITY FOR DAMAGES WILL NOT BE AFFECTED IF ANY REMEDY PROVIDED HEREIN SHALL FAIL FOR

ESSENTIAL PURPOSE.

DISCLAIMER: Some jurisdictions may not allow the exclusion or limitation of incidental or consequential damages for

products supplied to consumers, or the limitation of liability for personal injury, so the foregoing limitations and exclusions

may not apply or may be limited in their application to you. When implied warranties are not allowed to be excluded in their

entirety, they will be limited to the duration of the applicable written warranty. This warranty gives you specific legal rights

that may vary depending on the law of the applicable jurisdiction.

OBTAINING WARRANTY SERVICE: Please review the online "help" resources referred to in the accompanying documentation

before seeking warranty service. If the product is still not functioning properly after making use of these resources,

please access the online help website at diamondmm.com for warranty instructions or to obtain warranty services. Some

additional charges may apply for phone support.

DIAMOND™

VideoStream™

WPCTVPRO

User Manual

Manuel d’utilisation

Pour commencer

Contenu de l’emballage :

Récepteur PC à TV. Qté : 1.

Transmetteur USB PC à TV. Qté :1.

Câble HDMI. Qté :1.

CD d’installation. Qté :1.

Guide d’installation rapide. Qté :1.

Configurations requises du PC :

Le logiciel DisplayLink peut être utilisé sur PC, de netbooks et ordinateurs portables à ordinateurs de bureau. Le lecteur fonctionnera sur des processeurs allant de PC utilisant l'Atom N270, unités centrales de base Single Core, et bien sûr les plus récentes unités centrales Dual, Quad Core et Core i3/i5/i7.

La performance du logiciel dépend de la puissance de traitement disponible, ainsi que du système d’exploitation utilisé. Des systèmes plus puissants fourniront une meilleure performance.

Le logiciel DisplayLink est disponible pour les PC utilisant l’un des systèmes d’exploitation Windows suivants :

Windows 7 (32 bits ou 64 bits)

Windows Vista avec Service Pack 1 ou 2 (32 bits ou 64 bits)

Windows XP Édition Familiale ou Professionnelle (y compris l'édition Tablet PC) avec Service Pack 2 ou 3

Windows Server 2003, 2008 et 2008 R2

Remarque : les éditions 64 bits de XP ne sont pas prises en charge.

La configuration requise habituelle recommandée est :

Windows 7

Pour Windows 7, l’indice de performance Windows est une mesure utile du niveau matériel. Cet indice est accessible dans Ordinateur > Propriétés, ou dans Panneau de configuration > Système.

La configuration matérielle requise habituelle recommandée pour le PC est :

Un score de l’indice de performance Windows d’au moins 3 dans la catégorie « Graphique ; performance du bureau pour Windows Aero ».

Score de l’indice de performance Windows global d’au moins 3, comme indiqué par Microsoft.

Un port USB 2.0 minimum.

30 mégaoctets (Mo) d’espace disque disponible.

Écran d’ordinateur à utiliser avec le périphérique DisplayLink, s'il n'est pas intégré.

Accès au réseau pour les téléchargements de logiciel, ou accès à un lecteur CD-ROM.

Windows Vista

Pour Windows Vista, l’indice de performance Windows est une mesure utile du niveau matériel. Cet indice est accessible dans Ordinateur > Propriétés, ou dans Panneau de configuration > Système.

La configuration matérielle requise habituelle recommandée pour le PC est :

Un score de l’indice de performance Windows d’au moins 3 dans la catégorie « Graphique ; performance du bureau pour Windows Aero ».

Score de l’indice de performance Windows global d’au moins 3, comme indiqué par Microsoft.

Un port USB 2.0 minimum.

30 mégaoctets (Mo) d’espace disque disponible.

Écran d’ordinateur à utiliser avec le périphérique DisplayLink, s'il n'est pas intégré.

Accès au réseau pour les téléchargements de logiciel, ou accès à un lecteur CD-ROM.

Windows XP

Pour un ou deux moniteurs, usage commercial, objectif de productivité. Il est possible que cela ne fournisse pas une lecture DVD à fréquence d'images maximale en écran plein.

Unité centrale 1,2 GHz Single Core

Mémoire 512 Mo

Unité centrale 1,6 GHz

Mémoire 1 Go

Pour six écrans où un écran peut lire une vidéo DVD en plein écran :

1,8 GHz Core Duo

Mémoire 1 Go

Port USB 2.0 minimum

30 mégaoctets (Mo) d’espace disque disponible.

Écran d’ordinateur à utiliser avec le périphérique DisplayLink, s'il n'est pas intégré.

Accès au réseau pour les téléchargements de logiciel, ou accès à un lecteur CD-ROM.

Installation du matériel

AVIS IMPORTANT : l'émetteur WPCTVPRO et le récepteur doivent être placés en ligne droite et dans la même pièce. Cet appareil utilise la solution sans fil à bandes ultra larges de Samsung et ne peut émettre ou recevoir à travers les murs ou tout autre facteur d'obstruction.

Connectez le câble HDMI au récepteur WPCTVPRO, puis connectez l'autre extrémité du câble HDMI à votre HDTV/Projecteur. Vous pouvez également utiliser le port VGA si votre moniteur ou projecteur ne prend pas en charge HDMI. Câble VGA non inclus.

Branchez l'adaptateur secteur à une prise secteur, puis connectez la prise au récepteur WPCTVPRO.

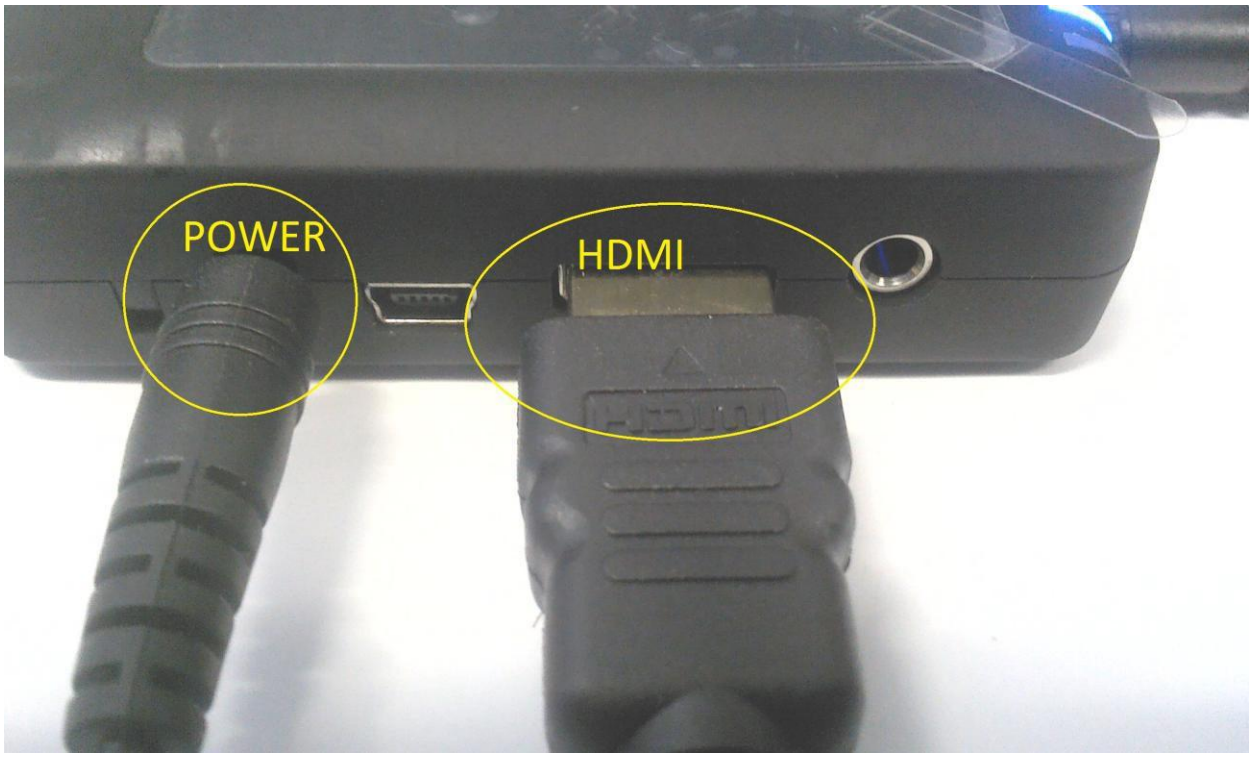

Effectuez ensuite l'installation du pilote logiciel. Ne branchez

pas l’adaptateur USB PC avant que cela ne vous soit indiqué ci-dessous. Les instructions suivantes concernent Windows 8 et Windows 7.

Les instructions pour Windows Vista et XP sont disponibles sur le CD d'installation.

Installation du logiciel graphique USB WPCTVPROmDisplayLink

La section suivante vous explique comment installer le logiciel graphique USB DisplayLink sur différents systèmes d'opération.

Windows 8 et Windows 8.1

Le logiciel Windows 8/8.1 DisplayLink peut être installé à partir de la mise à jour Windows (recommandée et doit avoir accès à internet).

Brancher le câble USB dans un port USB libre 2.0/3.0 de votre ordinateur. La mise à jour Windows se téléchargera automatiquement et commencera l'installation.

Autrement, le logiciel peut être téléchargé et installé à partir du site DisplayLink en suivant les étapes ci-dessous.

Avis important pour les installations manuelles! Ne pas connecter votre WPCTVPRO à votre PC avant l'installation.

Commentaire : Pour vous assurer que vous avez la dernière version du pilote, il est recommandé de télécharger les pilotes à partir de Displaylink.com qui est le jeu de composants graphiques utilisé sur le Diamond WPCTVPRO. Si vous n'avez pas accès à internet, vous pouvez utiliser les pilotes situés sur le CD d'installation inclus.

http://displaylink.com/support/downloads.php

Double-cliquer sur **Setup.exe** ou par exemple; **DisplayLink_7.6M0.exe**, où la version est 7.6 et peut varier selon le numéro de la dernière version.

Cliquer **Oui**

La fenêtre du logiciel DisplayLink et la convention de licence s'ouvrent.

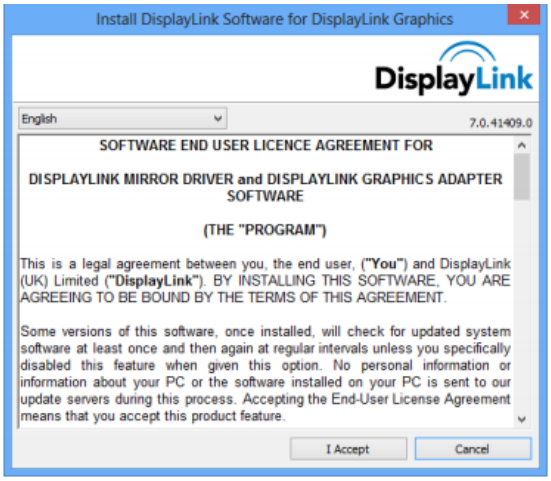

Cliquer **J'accepte**

DisplayLink Core software et DisplayLink Graphics installés.

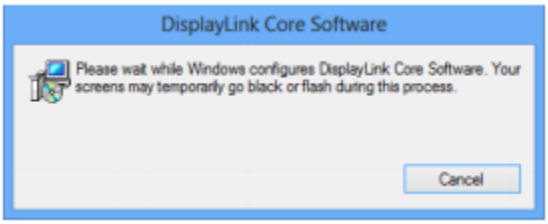

Commentaire : L'écran peut clignoter ou s'afficher en noir pendant l'installation.

Aucun message n'apparaîtra à la fin de l'installation.

Brancher votre appareil DisplayLink via le câble USB à votre PC.

Un message apparaîtra mentionnant que le logiciel s'auto-configure pour la première utilisation :

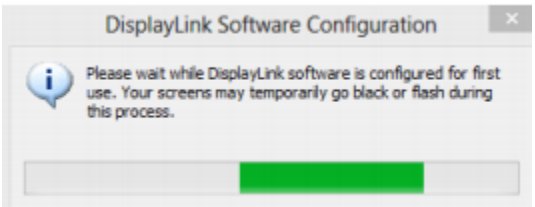

L'écran devrait clignoter et l'appareil DisplayLink devrait démarrer pour élargir le bureau Windows.

Windows 7

La méthode favorite d'installation est d'utiliser la fonction de mise à jour Window 7.

Brancher votre appareil DisplayLink via le câble USB à votre PC.

Windows détecte le nouveau matériel et télécharge automatiquement les pilotes.

Une fois téléchargée, l'installation s'exécutera.

La fenêtre du logiciel DisplayLink et la licence d'utilisateur s'ouvrent.

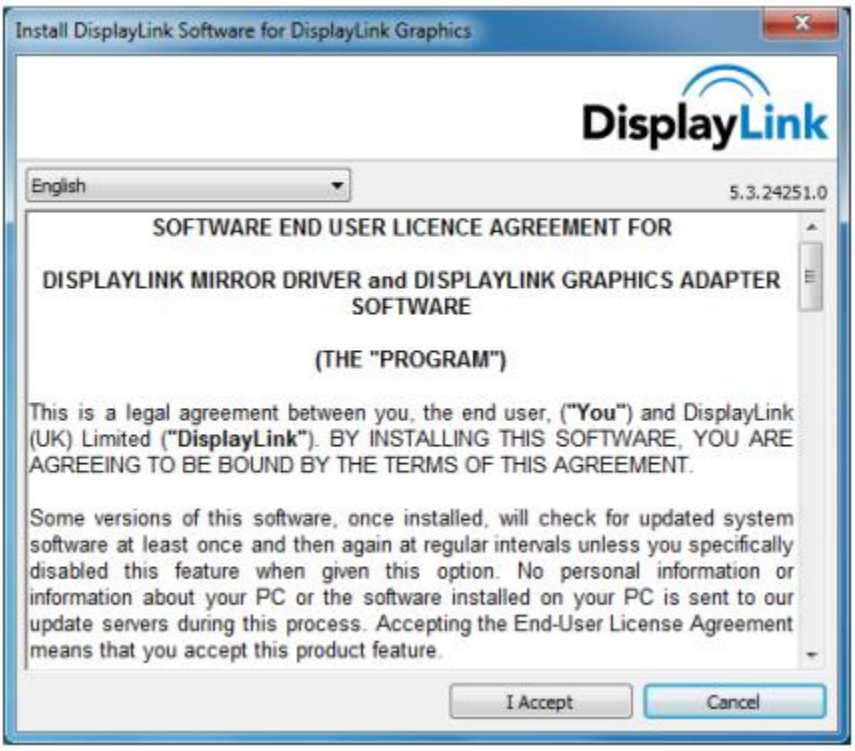

Cliquer **J'accepte**

Le logiciel DisplayLink Core s'installe

Commentaire : l'écran pourrait clignoter ou s'afficher en noir pendant l'installation.

Autrement, vous pouvez installer le logiciel à partir du site internet ci-dessous ou d'un CD-ROM :

http://displaylink.com/support/downloads.php

Avis important pour les installations manuelles! Ne pas brancher votre WPCTVPRO à votre PC avant d'installer.

Double-cliquer sur **Setup.exe** ou par exemple; **DisplayLink_7.6M0.exe**, où la version est 7.6 et peut varier selon le numéro de la dernière version.

La fenêtre de contrôle de compte d'utilisateur Windows s'ouvre (si autorisée dans le OS).

Cliquer **Oui**

La fenêtre du logiciel DisplayLink et la convention de licence s'ouvrent.

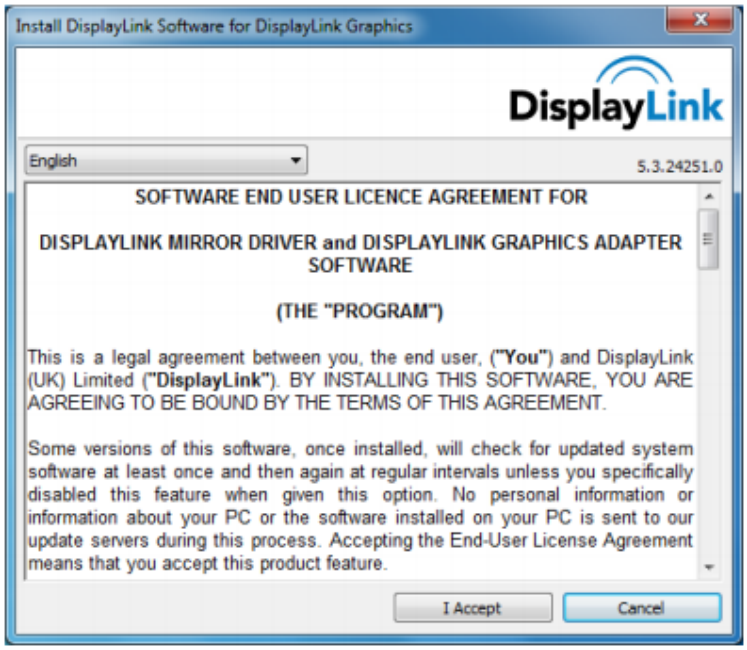

Cliquer **J'accepte**

Le logiciel DisplayLink Core software et DisplayLink Graphics s'installent

Commentaire : l'écran pourrait clignoter ou s'afficher en noir pendant l'installation.

Aucun message n'apparaîtra à la fin de l'installation.

Brancher votre appareil DisplayLink via le câble USB à votre PC.

Message d'installation du pilote de l'appareil

Commentaire : Sur certains appareils vous devrez possiblement redémarrer avant de pouvoir utiliser votre appareil DisplayLink. Pendant l'installation, un test de compatibilité s'effectuera sur votre système. Tout problème potentiel détecté sera transmis à l'utilisateur.

Configuration de vos écrans

Windows 8 et Windows 7

Lorsque les appareils sont reliés, une icône apparaît dans la barre de tâches. Cela vous donne accès au menu de gestion du DisplayLink.

À partir de la barre de tâches, cliquer sur *Afficher les icônes cachées* pour voir toutes les icônes disponibles.

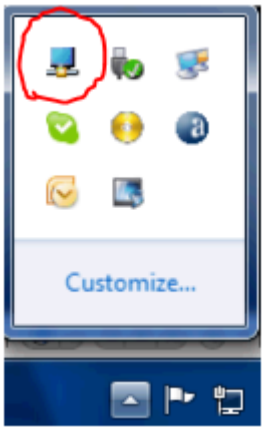

Cliquer sur l'icône DisplayLink .

Un menu apparaît avec plusieurs options. Celles-ci sont démontrées et décrites ci-dessous.

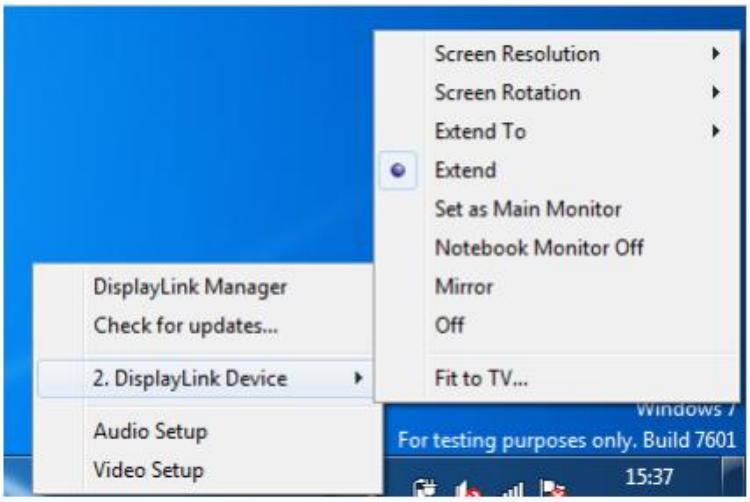

Menu Option	Sub-menu Option	Description
DisplayLink Manager		This is the UI title. Clicking on this item will show the version of DisplayLink software installed.
Check for Updates		Connects to the Microsoft Windows Update Server to check for newer software versions and downloads them, if available.
DisplayLink devices	Options to configure this DisplayLink device	In this section of the menu, a list of connected DisplayLink devices will appear. Each of these devices has its own sub-configuration menu. These Submenu options are covered in the table below.
Audio Setup		Opens the Windows Audio Configuration Window.
Video Setup		Opens the Windows Screen Resolution window.

Display Menu	Description	
Screen Resolution		Displays a list of available resolutions. Some resolutions may be enclosed by [ ]. Please see, Inferred Modes. This option is not available in mirror mode, as the resolution is defined as the resolution of the main monitor.
Screen Rotation	Normal	No rotation is applied to the DisplayLink display
	Rotated Left	Rotates the extended or mirrored display by 270 degrees clockwise.
	Rotated Right	Rotates the extended or mirrored display by 90 degrees clockwise.
	Upside-Down	Rotates the extended or mirrored display by 180 degrees clockwise.
Extend To	Right	Extends the display to the right of the main display.
	Left	Extends the display to the left of the main display.

Display Menu	Description	
	Above	Extends the display above of the main display.
	Below	Extends the display below the main display.
Extend		Extends your Windows desktop onto this display.
Set as Main Monitor		Sets this screen as the main display.
Notebook Monitor Off		Switches off the display of the notebook and makes the DisplayLink display the main display. Note: This option will only appear when 1 DisplayLink USB screen, is connected. It will also only appear on Laptop computers.
Mirror		Copies what is on the main display and reproduces it on this display. Note: The resolution of this display and the primary must be the same in mirror mode. This may be lower than the preferred resolution of the display. It is only possible to mirror 2 displays. If a display is already set to mirror mode, this option will be greyed out for the other DisplayLink displays and not available.
Off		Switches off this display.
Fit to TV		If the Windows desktop does not completely appear on the TV, this option can be used to adjust the size of the Windows desktop. See "Fit to TV" for details on how to configure this feature. Notes: • This option will only appear when 1 DisplayLink USB screen, is connected • This option will only work in extend mode. Selecting the option in mirror mode will extend the displays.

Informations pour soutien technique

Support multimédia Diamond en ligne :

http://tickets.diamondmm.com/

Base de connaissances Diamond Multimedia en ligne:

http://tickets.diamondmm.com/kb/index.php

Page du produit Diamond Multimedia WPCTVPRO :

http://www.diamondmm.com/WPCTVPRO-display-adapter.html

Obtenir les derniers pilotes de DisplayLink :

Pour vous assurer que vous possédez la dernière version des pilotes de DisplayLink, il est recommandé de télécharger les pilotes à partir du lien suivant :

http://displaylink.com/support/downloads.php

Base de connaissances de DisplayLink :

http://displaylink.com/support/knowledgebase.php

Garantie limitée à un an

La garantie décrite ci-dessous concerne uniquement l'acheteur d’origine et n'est pas transférable.

VEUILLEZ NOTER QUE LE PRODUIT QUE VOUS AVEZ ACHETÉ EST DISTRIBUÉ ET GARANTI PAR DIAMOND.

MULTIMEDIA (« DIAMOND ») COMME DÉCRIT CI-DESSOUS. TOUTE QUESTION CONCERNANT CETTE GARANTIE ET RÉCLAMATION CONCERNANT LA GARANTIE DOIVENT ÊTRE ADRESSÉES À DIAMOND.

Diamond garantit à l'acheteur d’origine du matériel, que le produit est exempt de défauts matériels ou d’assemblage sous des conditions normales d'utilisation et d'entretien pour une période d'un (1) an à compter de la date d'achat au détail.
Nous garantissons que tous les câbles et accessoires fournis avec un produit Diamond sont exempts de défauts matériels ou d’assemblage sous des conditions normales d'utilisation et d'entretien pour une période de quatre-vingt-dix (90) jours à compter de la date d'achat au détail.
La seule obligation de Diamond dans le cadre de cette garantie sera, au choix de Diamond, de : (i) réparer le produit ou la pièce défectueuse, (ii) fournir au client un produit ou une pièce équivalente pour remplacer le produit défectueux. Lorsqu'un produit ou une pièce est remplacée ou échangée, l'article devient la propriété du client et l'article remplacé ou échangé devient la propriété de Diamond. Quand un remboursement ou un produit de remplacement est fourni, le produit défectueux devient la propriété de Diamond. Les produits ou pièces de rechange peuvent être neufs ou comprendre des pièces d’occasion réparables et équivalentes au produit d'origine. Si, au moment de la réparation, le produit est « hors garantie » ou dans les quatre-vingt-dix (90) derniers jours de la période de garantie, Diamond garantit une réparation pour les quatre-vingt-dix (90) jours. Tout logiciel fourni est soumis aux termes du contrat de licence logiciel de l’utilisateur final associé.

EXCLUSIONS ET RESTRICTIONS CETTE GARANTIE NE S'APPLIQUE QU'AUX PRODUITS VENDUS PAR DIAMOND APRÈS LE 1ER MAI 2007. CETTE GARANTIE N'EST APPLICABLE QUE SI LE PRODUIT A ÉTÉ ENREGISTRÉ SOUS TRENTE (30) JOURS À COMPTER DE LA DATE D’ACHAT DU PRODUIT. POUR ÊTRE ADMISSIBLE À CETTE GARANTIE, VOUS DEVEZ ENREGISTRER VOTRE PRODUIT SUR
diamondmm.com. L'ORIGINAL DU REÇU DE CAISSE INDIQUANT LA DATE D'ACHAT DU PRODUIT EST LA PREUVE DE LA DATE D'ACHAT. DIAMOND PEUT DEMANDER LA FACTURE ORIGINALE OU UNE COPIE COMME PREUVE DE LA

DATE D'ACHAT.

Diamond ne garantit pas les produits tiers distribués par Diamond « TELS QUELS », sauf indication contraire. Des produits tiers peuvent être garantis par le tiers. Diamond ne fait aucune garantie ou déclaration que : (i) le fonctionnement du produit sera ininterrompu ou sans erreur, (ii) les défauts du produit seront corrigés, ou (iii) que le produit répondra aux exigences du client ou fonctionnera avec du matériel ou des logiciels fournis par des tiers.

DANS TOUTE LA MESURE AUTORISÉE PAR LA LOI, LES GARANTIES, RECOURS ET RESTRICTIONS CONTENUES DANS LA PRESENTE SONT EXCLUSIFS ET REMPLACENT TOUTES LES AUTRES GARANTIES OU CONDITIONS, EXPRESSES OU IMPLICITES, DE FAIT OU PAR APPLICATION DE LA LOI, STATUTAIRE OU AUTRE, Y COMPRIS, SANS S'Y LIMITER, LES GARANTIES OU CONDITIONS DE QUALITÉ MARCHANDE, D'ADÉQUATION À UN USAGE PARTICULIER, DE QUALITÉ, DE CORRESPONDANCE AVEC LA DESCRIPTION ET D'ABSENCE DE CONTREFAÇON, QUI SONT EXPRESSÉMENT DIVULGUÉES. DIAMOND NE SERA PAS RESPONSABLE EN VERTU DE CETTE GARANTIE SI SES TESTS ET EXAMENS RÉVÈLENT QUE LE DÉFAUT OU MAUVAIS FONCTIONNEMENT DU PRODUIT OU LOGICIEL N'EXISTE PAS OU A ÉTÉ CAUSÉ PAR LE CLIENT OU LA MAUVAISE UTILISATION, LA NÉGLIGENCE, LA MAUVAISE INSTALLATION, LES TESTS, LES TENTATIVES NON AUTORISÉES D'OUVRIR, LA RÉPARATION OU LA MODIFICATION DU PRODUIT OU LOGICIEL PAR UN TIERS, OU TOUTE AUTRE CAUSE AU-DELÀ DE L'UTILISATION PRÉVUE, OU PAR UN ACCIDENT, L'INCENDIE, LA FOUDRE ET AUTRES CATASTROPHES DE FORCE MAJEURE. CETTE GARANTIE NE COUVRE PAS LES PRODUITS UTILISÉS À DES FINS LIÉES AU NUCLÉAIRE, AUX ARMES, OU À DES FINS MÉDICALES OU POUR SAUVER LA VIE D'AUTRUI. DANS TOUTE LA MESURE AUTORISÉE PAR LA LOI, DIAMOND DÉCLINE ÉGALEMENT POUR ELLE-MÊME ET SES FOURNISSEURS TOUTE RESPONSABILITÉ, QUE CE SOIT DANS UN CONTRAT OU PAR FAUTE (Y COMPRIS LA NÉGLIGENCE), POUR DOMMAGES INDIRECTS, CONSÉCUTIFS, SPÉCIAUX OU PUNITIFS DE QUELQUE NATURE QUE CE SOIT, OU DE TOUTE AUTRE PERTE DE REVENUS OU DE PROFITS, PERTE DE COMMERCE, PERTE D'INFORMATIONS OU DE DONNÉES OU TOUTE AUTRE PERTE FINANCIÈRE RÉSULTANT DE OU EN RELATION AVEC LA VENTE, L'INSTALLATION, L'ENTRETIEN, L'UTILISATION, LA PERFORMANCE, LA PANNE OU L'INTERRUPTION DE SES PRODUITS, MÊME SI DIAMOND, SES FOURNISSEURS OU SES REVENDEURS ONT ÉTÉ INFORMÉS DE LA POSSIBILITÉ DE TELS DOMMAGES. LA SEULE RESPONSABILITÉ DE DIAMOND EN CE QUI CONCERNE SON PRODUIT SE LIMITE À LA RÉPARATION OU AU REMPLACEMENT DU PRODUIT, AU CHOIX DE DIAMOND. CETTE LIMITATION DE RESPONSABILITÉ POUR LES DOMMAGES NE SERA PAS AFFECTÉE SI TOUT RECOURS MENTIONNÉ DANS LA PRÉSENTE ÉCHOUAIT DANS SON OBJECTIF ESSENTIEL.

AVERTISSEMENT : Certaines juridictions n'autorisent pas l'exclusion ou la restriction de dommages directs ou indirects pour des produits fournis aux consommateurs, ou la restriction de responsabilité pour les dommages corporels, de sorte que les limitations et exclusions peuvent ne pas s'appliquer ou être limitées dans leur application. Lorsque les garanties implicites ne sont pas autorisées à être exclues dans leur intégralité, elles seront limitées à la durée de la garantie écrite applicable. Cette garantie vous donne des droits légaux spécifiques qui peuvent varier en fonction de la loi de la juridiction applicable.

OBTENTION DU SERVICE DE GARANTIE : Veuillez examiner les ressources en ligne, indiquées dans la documentation ci-jointe, avant de solliciter un service de garantie. Si le produit ne fonctionne toujours pas correctement après avoir utilisé ces ressources, veuillez consulter le site Internet www.diamondmm.com pour obtenir des instructions concernant la garantie ou des services de garantie. Certains frais supplémentaires peuvent s'appliquer pour l'assistance téléphonique.